

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/24533 A1

(51) International Patent Classification⁷: **H04N 7/52,**
G11B 20/10

(21) International Application Number: PCT/JP00/06643

(22) International Filing Date:
27 September 2000 (27.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/279150 30 September 1999 (30.09.1999) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LIM, Sau, Tsien**
[MY/CA]; Apt 106, 9880 Manchester Drive, Burnaby, British Columbia V3N 4R3 (CA). **MEIARASHI, Makoto**

[JP/JP]; 3-54-6-12, Nagao Higashimachi, Hirakata-shi, Osaka 573-0105 (JP). **HOASHI, Katsumi** [JP/JP]; 1-16-22, Kikusuitori, Moriguchi-shi, Osaka 570-0032 (JP). **YAMAGUCHI, Ryoji** [JP/JP]; 5-7-404, Myokenzaka, Katano-shi, Osaka 576-0021 (JP). **MONDA, Ken** [JP/JP]; 6-58-31, Hiyoshidai, Takatsuki-shi, Osaka 569-1022 (JP).

(74) Agents: **AOYAMA, Tamotsu** et al.; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).

(81) Designated States (national): CN, US.


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A BIT STREAM BUFFERING AND DEMULTIPLEXING APPARATUS FOR A DVD AUDIO DECODING SYSTEM

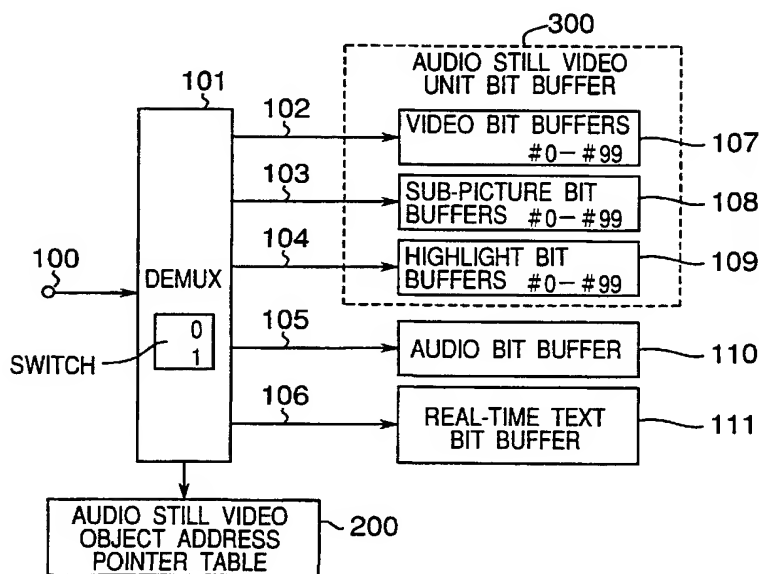

(57) Abstract: An apparatus for bit stream buffering and demultiplexing for a DVD Audio decoder system uses one demultiplexer to demultiplex both audio program stream and audio still video program stream. Demultiplexed audio still video data is stored in the elementary form of ASVU buffer. Storing elementary data as ASVU buffer reduces the storage space and allows the system to check for syntax error in the program stream level earlier. The demultiplexer also generates an audio still video address pointer table indicating the access address for each audio still video object, thus allowing fast random access by the decoder.



WO 01/24533 A1

DESCRIPTION

A BIT STREAM BUFFERING AND DEMULTIPLEXING APPARATUS FOR A
DVD AUDIO DECODING SYSTEM

5 TECHNICAL FIELD

This invention relates to implementation of a
data buffering and demultiplexing apparatus for a DVD-Audio
decoder system.

10 BACKGROUND ART

"DVD Specifications for Read-Only Disc Part 4
Audio Specifications Version 0.9", referred to as "DVD
Audio specifications" hereinafter, specifies a new type of
data stream, audio still video program stream. Audio still
15 video stream is not multiplexed with audio program stream
but stored as separate object on its own. This is
different from "DVD Specifications for Read-Only Part 3
Video Specifications Version 1.1", referred to as "DVD
Video specifications" hereinafter, where all elementary
20 data streams such as audio, video and sub-picture are
multiplexed into one logical program stream. An audio
still video object (ASVOB) is formed from three elementary
stream objects, namely, highlight information, 1 to 3 sub-
pictures and still video. An alternate form exists where
25 an audio still video is formed only by a still video object.

A collection of audio still video objects makes up an audio still video unit (ASVU). A limited number of audio still video objects can exist in one audio still video unit. According to DVD Audio Specifications, one audio still video unit is limited to 99 audio still video objects, and the size is limited to 2 Megabytes. A collection of audio still video units makes up an audio still video stream (ASVUS).

In the DVD Audio specifications, a DVD audio decoder must buffer the whole audio still video unit in an audio still video unit buffer. Two demultiplexers capable of decoding program streams are needed. One of them demultiplexes the audio still video unit program stream from an audio still video unit buffer, and the other demultiplexes the audio program stream from a DVD Audio disc. In addition, DVD Audio specifications also stipulate that the audio still video objects in an audio still video unit can be accessed in any unknown order until the audio still video is to be presently selected. Thus, the starting location of each audio still video in an audio still video unit needs to be known.

Figure 1 shows an example of an implementation based on the decoder model specified in the DVD Audio specifications. When input data is a type of audio still video program stream, the input data is directed by a

selector to be stored (or buffered) into an audio still
video buffer (ASVU Buffer) via a pre-loading terminal 0.
When the buffering of the data is completed, the selector
is switched back to a decoding position 1. When input data
5 is a type of audio program stream, the data is directed to
an audio program stream demultiplexer, DEMUX2 and then the
demultiplexed data such as audio elementary stream is
written into an audio bit buffer and other buffers such as
a real time text bit buffer. At the same time, the data
10 from the audio still video unit buffer (ASVU Buffer) is
read into the other demultiplexer, DEMUX1, which
demultiplexes the data to be written into video, sub-
picture and highlight bit buffers. Audio still video
address (ASV Address) table stores the start and/or end
15 address of each audio still video object in the audio still
video unit. These addresses are used to select the correct
audio still video object to be sent to DEMUX1.

Looking at Figure 1, it is obvious that incoming
data stream comprises two independent multiplexed program
20 streams, namely, audio still video program stream and audio
program stream. From a DVD Audio decoder point of view,
this is different from that of a DVD Video decoder.
Therefore, two program stream demultiplexers are needed for
both audio still video program and audio program. This
25 solution is more costly, because the presently existing DVD

Video decoder system only requires one demultiplexer. Alternatively, a single high speed demultiplexer that could demultiplex two streams simultaneously is needed. This would require a new demultiplexer that is capable of
5 decoding at rate two times that of a conventional demultiplexer. Again, this is more costly than using a slower speed demultiplexer that already exists in the DVD Video decoder.

This invention discloses a method that buffers
10 the demultiplexed audio still video unit stream after it has been demultiplexed by a program stream demultiplexer similar to that used in the current DVD Video decoder system. This means that the invention can be implemented by effectively using only one program stream demultiplexer.

15 In addition, the size of the bit buffers in the system for storing demultiplexed elementary stream can be reduced. This saving comes from the fact that the size of the audio still video unit after it has been demultiplexed is smaller in size than the original program stream. The
20 other saving comes from the fact that a separate video bit buffer, sub-picture bit buffer and highlight bit buffer are not required anymore. The audio still video unit bit buffer which stores the demultiplexed elementary audio still video data is already in the bit buffer format. This
25 also improves the time it takes to access a specific audio

still video object. It is no longer necessary to send the audio still video object to a demultiplexer first.

In a conventional system, such as a DVD Video demultiplexing of audio/video stream, the program stream is demultiplexed only when it is needed. By performing demultiplexing early during pre-loading of audio still video unit program stream into the audio still video unit bit buffer, the system can detect potential bit stream syntax error in advance, before the data is decoded.

10

DISCLOSURE OF INVENTION

For the purpose of solving the above-described problems, the bit stream buffering and demultiplexing architecture according to the present invention was designed.

15

In order to keep the cost of the DVD Audio decoder down by not adding additional demultiplexer in the system, a buffering method which demultiplexes the audio still video unit program stream during the pre-loading to the audio still video unit bit buffer is invented. In order to reduce the amount of bit-stream buffers used in a decoder system, a means for bit buffer memory sharing is invented. In order to help the decoder system better manages bit-stream errors, error checking the program stream syntax during demultiplexing allow the decoder to

20

25

detect stream error early, before the DVD Audio decoder needs to present any data to the user. In order to speed up access time in accessing a particular audio still video object from the audio still video unit bit buffer, demultiplexed audio still video unit program stream is
5 stored in the audio still video unit bit buffer. The address locations of each object in an audio still video unit are easily available to speed up accesses as well.

According to an essential feature of the present
10 invention, a bit stream buffering and demultiplexing apparatus for a DVD Audio decoding system comprises: a demultiplexer for demultiplexing a coded program stream to elementary streams; an audio still video unit bit buffer for storing demultiplexed audio still video program
15 streams; a bit stream buffer for storing demultiplexed audio program stream, and an audio still video object address pointer table storing address locations of the demultiplexed audio still video program streams.

In this construction, the audio still video
20 object address pointer table may further store status information of the demultiplexed audio still video program streams.

Also, the demultiplexer may comprise: a means for demultiplexing the coded program stream to
25 elementary streams, and a means for switching of writing to

said audio still video unit bit buffer from said bit stream buffers, the switching occurring whenever input bitstream is audio still video program stream.

Also, the audio still video unit bit buffer
5 for storing the demultiplexed audio still video bit streams may comprise: a means for storing elementary streams of audio still video, and a means for storing start address pointers of all or sub group of elementary streams of an audio still video unit.

10 In this construction, the audio still video unit bit buffer further may comprise a means for storing status information relating to all or sub group of an audio still video unit.

Also, the audio still video address pointer
15 table may comprise: a means for storing start and/or end address pointers of all or sub group of elementary streams of an audio still video unit, and a means for storing status information relating to all or sub group of an audio still video unit.

20 Moreover, the status information storing means may comprise: a means for storing syntax error information, and a means for storing other information related to the audio still video unit.

Another aspect of the present invention provides
25 a bit stream buffering and demultiplexing method for a DVD

Audio decoding system, which comprises the steps of:
demultiplexing a coded program stream to elementary
streams; storing demultiplexed audio still video program
streams; storing demultiplexed audio program stream, and
5 storing address locations of the demultiplexed audio still
video program streams, wherein the demultiplexing step
includes a step of demultiplexing the audio still video
unit program stream during a pre-loading to the audio still
video unit bit buffer.

10 Further another aspect of the present invention
provides a DVD Audio decoding system having a bit stream
buffer and a demultiplexer, wherein the multiplexer is only
one demultiplexer which generates an audio still video
address pointer table indicating an access address for each
15 audio still video object, to demultiplex both audio program
stream and audio still video program stream, and the bit
stream buffer comprises means for storing demultiplexed
audio still video data in an elementary format.

The DVD Audio decoder system reads in bit stream
20 from the DVD Audio disc and sends it to the demultiplexer.
For the DVD Audio decoder, audio still video unit program
stream is read from the disc first and passes to the
demultiplexer. The demultiplexer strips off the program
stream layer and stores elementary video, highlight
25 information and sub-picture streams in the audio still

video unit bit buffer. This is done during the audio still
video unit pre-loading specified in the DVD Audio
specifications. The demultiplexer also checks the structure
of the audio still video program stream to make sure it
5 conforms to the structure outlined in DVD Audio
specifications. Bit stream errors are reported to the
system. The demultiplexer also keeps track of the location
of each audio still video objects demultiplexed. These
address locations are buffered to allow random access to
10 specific audio still video object during audio program
decoding. After the decoder completes the pre-loading
process, audio program stream is read from the DVD Audio
disc. The same demultiplexer then demultiplexes the audio
program stream that contains audio and other optional
15 streams such as real-time text. Demultiplexed elementary
data are stored in appropriate bit buffers.

From the audio bit buffers, audio decoder reads
the audio elementary stream, decodes and presents the data
out. At the same time, using the audio still video objects
20 address stored in the pointer table, the video, sub-picture
and highlight information decoders read in the appropriate
audio still video object, decode and present the data to
the user. The presentation order of the audio still video
objects depends on presentation information stored in the
25 DVD Audio disc or from the interactive controls of the DVD

Audio decoder system user.

BRIEF DESCRIPTION OF DRAWINGS

These and other objects and features of the present invention will be readily understood from the following detailed description taken in conjunction with preferred embodiments thereof with reference to the accompanying drawings, in which like parts are designated by like reference numerals and in which:

Figure 1 is a prior-art of the current invention;

Figure 2 is an example embodiment of the invented DVD Audio stream buffering and demultiplexing system;

Figure 3 is an example configuration of the audio still video object address pointer table and audio still video unit bit buffer mapping of the embodiment of Figure 2; and

Figure 4 is another example configuration of the audio still video object address pointer table and audio still video unit bit buffer mapping of the embodiment of Figure 2.

Best Mode for Carrying Out the Invention

Before the description proceeds, it is to be noted that, since the basic structures of the preferred embodiments are in common, like parts are designated by the

same reference numerals throughout the accompanying drawings.

An example of an embodiment of the present invention is described with reference to Figure 2. In Figure 2, a program stream comes in from a program stream input terminal 100 to a demultiplexer, DEMUX 101. The input stream is multiplexed according to ISO13818-1 MPEG-2 Program Stream Standard as well as to DVD Audio and Video specifications. DEMUX 101 demultiplexes the program stream into elementary data streams. For the current embodiment of the present invention, but not limited by this, DEMUX supports demultiplexing into the following elementary streams: video, sub-picture, highlight information, audio and other data such as real-time text. The DEMUX 101 demultiplexes the input stream and then the demultiplexed elementary data streams are written into video bit buffers 107, sub-picture bit buffers 108, highlight bit buffers 109, audio bit buffer 110 and other buffers 111 such as real-time text bit buffer.

In this embodiment, video buffers are logical buffers that store all the video objects of all the audio still video objects contained in an audio still video unit. The same is said for sub-picture bit buffers and highlight bit buffers. These 3 groups of bit buffers make up the audio still video unit bit buffer 300. More details on the mapping of this buffer shall be stated later.

There are two types of multiplexed program streams input from the input terminal 100 to DEMUX 101. Audio still video unit stream is a multiplexed of video, sub-picture and highlight data. Audio program stream is a multiplexed of audio and real-time text data. Accordingly, DEMUX 101 may include a switch means for switching the writing of the demultiplexed program streams between the audio still video unit bit buffer (300) and the bit stream buffers (110, 111) in accordance with the types of the input program streams. A selector as shown in Figure 1 may be used as a switch means. Thus, when the input data is a type of audio still video program stream, the demultiplexed data output of DEMUX 101 is directed by the selector to be stored in the audio still video unit bit buffer (300). When the input data is a type of audio program stream, the demultiplexed data output of DEMUX 101 is directed to the bit stream buffers (110, 111).

When the system is performing audio still video pre-loading, audio still video program stream is inputted to DEMUX. DEMUX writes the demultiplexed data via buses 102, 103 and 104 into the respective bit buffers 107, 108 and 109 in the audio still video unit buffer 300. This unit buffer is similar to the ASVU buffer stated in the prior art shown in Fig. 1 except that the elementary data streams are stored instead. During the demultiplexing of

audio still video program stream, DEMUX also calculates the start and end location of each video, sub-picture and highlight elementary streams and stores these addresses in an audio still video object address pointer table 200.

5 This table is essential for random accessing of audio still video object during the decoding phase (or mode) of the decoder.

During audio still video unit demultiplexing, DEMUX can perform various types of stream integrity check
10 such as program stream syntax check or audio still video stream structure check. The number of audio still video objects can be counted and then confirmed with the number stored elsewhere in the disc. The order of video, sub-picture and highlight in an audio still video object can
15 also be double-checked to confirm the validity of the stream. The size of the audio still video unit can also be confirmed against the limit set by the Specification. All these information can provide good indication to the decoder as to the data integrity of the disc.

20 When the system completes audio still video pre-loading, the system inputs audio program stream to start audio decoding. During this time, DEMUX demultiplexes the audio program stream into audio and real-time text elementary streams, and stores the elementary streams data
25 into their respective bit buffers 110 and 111 via buses 105

and 106. At this time, the video, sub-picture, highlight, audio and real-time text elementary streams are read from their respective bit buffers simultaneously and sent to their respective decoder for decoding. The video, sub-picture and highlight elementary streams are accessed depending on which audio still video object within the audio still video unit has been selected for decoding. This information may not be known until 0.4 second before the audio still video object is to be presented, according to DVD Audio Specifications. The audio still video object address pointer table 200 stores the information needed by the decoder to read the correct data from the audio still video unit bit buffer 300.

Figure 3 shows an embodiment of the audio still video object address pointer table 200 and the audio still video unit bit buffer 300. In this embodiment, DEMUX stores the start address pointer of each audio still video object (ASVOB 1-99) it encounters when demultiplexing the audio still video unit program stream as in the audio still video object address pointer table 200. Each of the start addresses in turn points to a start position of each of the audio still video objects stored in the audio still video unit bit buffer 300. The beginning portion of each audio still video object in the audio still video bit buffer further contains pointer addresses that point to the start

of sub-picture bit buffer and video bit buffer for that particular audio still video object. Highlight bit buffer does not need pointer address as it immediately follows the video pointer addresses and status information data. It is
5 noted here that the audio still video address pointer table (200) may store start and/or end address pointers of all or sub group of elementary streams of an audio still video unit.

Referring to Figure 3, as to an audio still video
10 object 1 (ASVOB1), an address pointer 201 in the address pointer table 200 points to the beginning of the audio still video object 1 (ASVOB1) in the audio still video bit buffer 300. An arrow line 202 indicates this pointer in Figure 3. The sub-picture address pointer 203 for ASVOB1
15 in turn points to a start location of a sub-picture bit buffer 206 for ASVOB1, and an arrow line 208 shows this pointer. A video address pointer 204 for ASVOB1 immediately after the sub-picture address pointer 203 points to a start location of a video bit buffer 207 for
20 ASVOB1, and an arrow line 209 shows this pointer. Immediately after the video address pointer 204 for ASVOB1, extra status information of ASVOB1 is stored indicative of such as whether the current audio still video object contains valid highlight data, or syntax error information.
25 Numeral 301 shows the status information for ASVOB1. A

highlight bit buffer 205 for ASVOB1 follows immediately after the status information 301 for ASVOB1. In cases when no highlight data or sub-picture exist, setting sub-picture pointer address to 0 will indicate that only a video bit
5 buffer exists in the bit stream.

For most implementation, the audio still video address pointer table would be implemented using an internal static random access memory. For the audio still video unit bit buffer, due to its larger size, it is
10 usually implemented as part of a system memory in an external dynamic random access memory. This particular embodiment for the audio still video address pointer table allows part of the address pointer to be stored in the cheaper dynamic random access memory typically used for
15 audio still video unit bit buffer. The trade off for such system would be longer time to access the addresses to the audio still video objects.

Figure 4 shows an alternate embodiment of the audio still video object address pointer table 200 and
20 audio still video unit bit buffer 300, related to current invention. In this embodiment, the audio still video object address pointer table contains the address pointers needed to access each audio still video objects in the audio still video unit bit buffer. The table also contains
25 extra status information of each audio still video object

to store syntax error information and extra status data.

Unlike previous embodiment in Figure 3, all pointer addresses to access the audio still video objects are stored in the pointer table 200. This embodiment has an advantage of faster accesses to audio still video object start address, with tradeoff of a larger pointer table. The audio still video object start address points to the start address of the specific audio still video object in the audio still video unit buffer. This also points to the highlight bit buffer of the specified audio still video object (ASVOB). The video address pointer points to the specific video bit buffer of the specified audio still video object in the audio still video bit buffer. The start address of each sub-picture bit buffer is calculated indirectly from the audio still video object address pointer.

In this embodiment, size of the highlight bit buffer is limited to 704bytes. Accordingly, the start address of sub-picture bit buffer is 704bytes offset from the start of highlight bit buffer. In the case when no valid highlight information exists in the bit buffer, the status information field for the specific audio still video object will indicate such condition and video address pointer will have value equal to highlight bit buffer start address offset by 704bytes.

The decoder uses the address information stored in the audio still video address pointer table and/or the audio still video unit bit buffer to access the correct audio still video object bit buffers quickly. This is very important for implementing fast random access functions for audio still videos.

Although the present invention has been described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims, unless they depart therefrom.

INDUSTRIAL APPLICABILITY

The effect of this invention is a cost efficient implementation of a bit stream buffering and demultiplexing system for DVD Audio decoder system. This is due to the use of only one demultiplexer. Storing of audio still video unit in an elementary form also have the advantages of reducing the size of bit buffer memories and speeding up access to the audio still video object data.

CLAIMS

1. A bit stream buffering and demultiplexing apparatus for a DVD Audio decoding system comprising:

5 a demultiplexer for demultiplexing a coded program stream to elementary streams;

an audio still video unit bit buffer for storing demultiplexed audio still video program streams;

a bit stream buffer for storing demultiplexed audio program stream, and

10 an audio still video object address pointer table storing address locations of the demultiplexed audio still video program streams.

2. A bit stream buffering and demultiplexing apparatus according to claim 1, wherein said audio still video object address pointer table further stores status information of the demultiplexed audio still video program streams.

3. A bit stream buffering and demultiplexing apparatus according to claim 1, wherein said demultiplexer comprises:

20 a means for demultiplexing the coded program stream to elementary streams, and

a means for switching of writing to said audio still video unit bit buffer from said bit stream buffers, said switching occurring whenever input bitstream is audio

25

still video program stream.

4. A bit stream buffering and demultiplexing apparatus according to claim 1, wherein said audio still video unit bit buffer for storing the demultiplexed audio still video bit streams comprises: a means for storing elementary streams of audio still video, and a means for storing start address pointers of all or sub group of elementary streams of an audio still video unit.

5. A bit stream buffering and demultiplexing apparatus according to claim 4 , wherein said audio still video unit bit buffer further comprises a means for storing status information relating to all or sub group of an audio still video unit.

6. A bit stream buffering and demultiplexing apparatus according to claim 1 , wherein said audio still video address pointer table comprises: a means for storing start and/or end address pointers of all or sub group of elementary streams of an audio still video unit, and a means for storing status information relating to all or sub group of an audio still video unit.

7. A bit stream buffering and demultiplexing apparatus according to claim 6, wherein said status information storing means comprises: a means for storing syntax error information, and a means for storing other information related to the audio still video unit.

8. A bit stream buffering and demultiplexing method for a DVD Audio decoding system, comprising the steps of:

demultiplexing a coded program stream to
5 elementary streams;

storing demultiplexed audio still video program streams;

storing demultiplexed audio program stream, and

storing address locations of the demultiplexed
10 audio still video program streams,

wherein the demultiplexing step includes a step of demultiplexing the audio still video unit program stream during a pre-loading to the audio still video unit bit buffer.

15 9. A DVD Audio decoding system having a bit stream buffer and a demultiplexer,

said multiplexer is only one demultiplexer which generates an audio still video address pointer table indicating an access address for each audio still video
20 object, to demultiplex both audio program stream and audio still video program stream,

said bit stream buffer comprising means for storing demultiplexed audio still video data in an elementary format.

1/3

Fig. 1


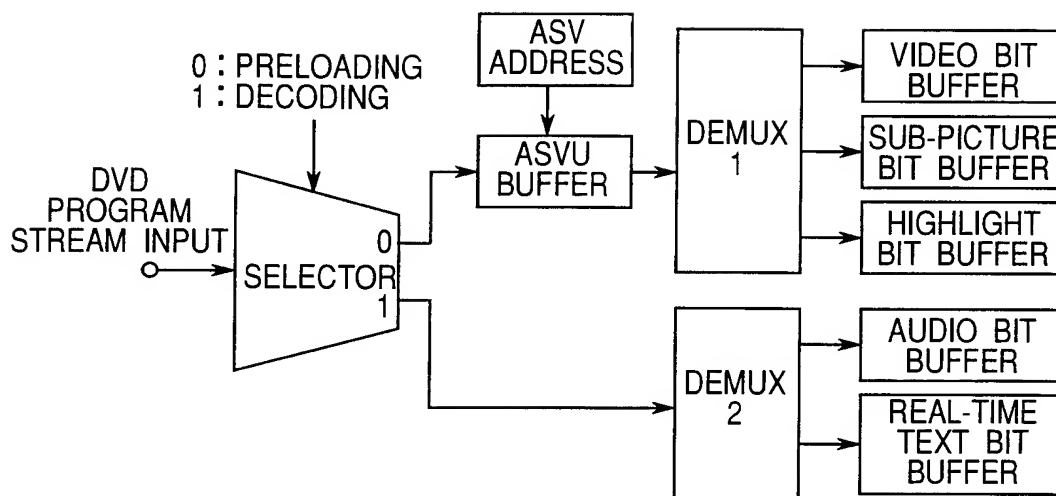


Fig. 2

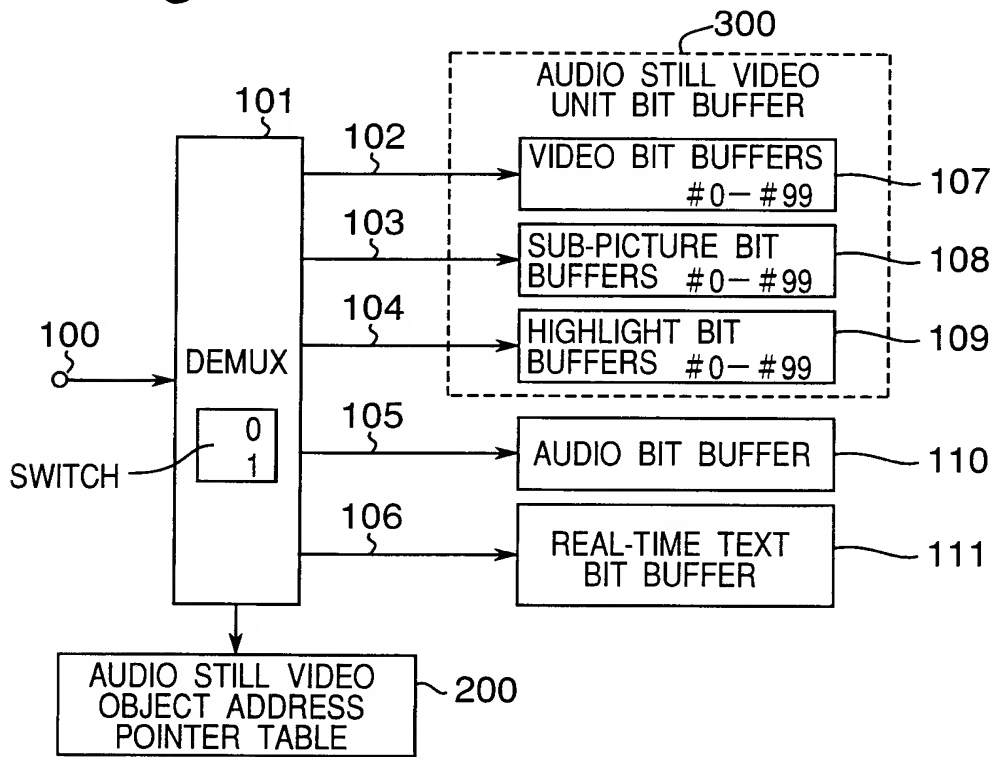

2/3

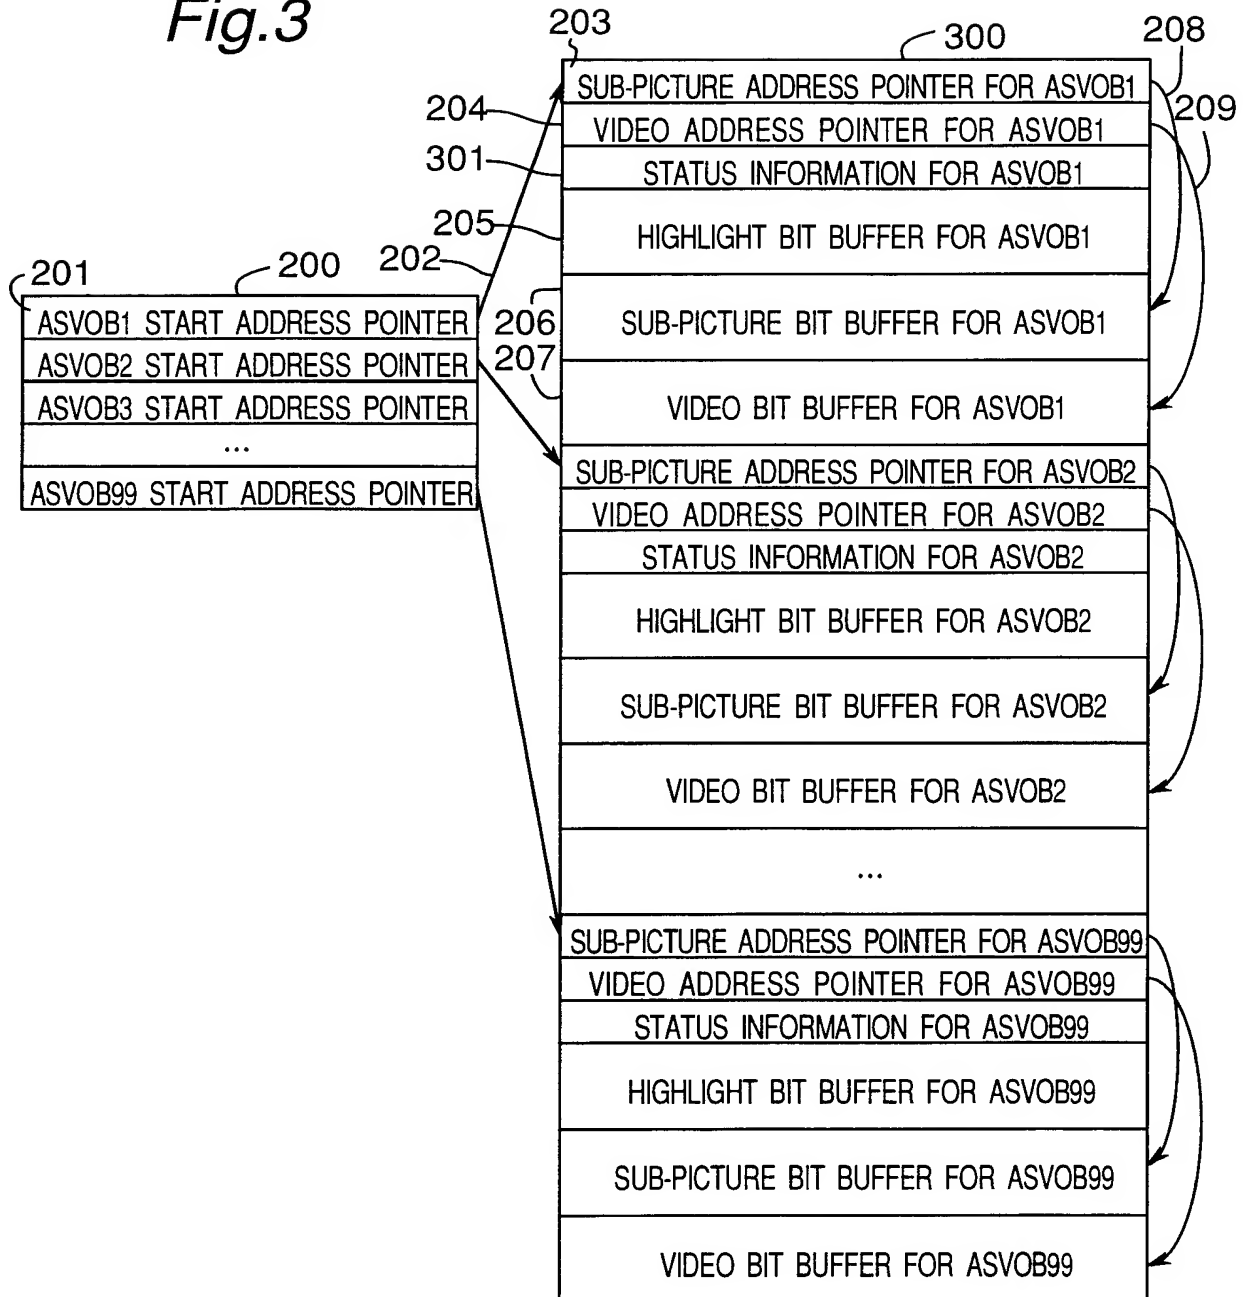
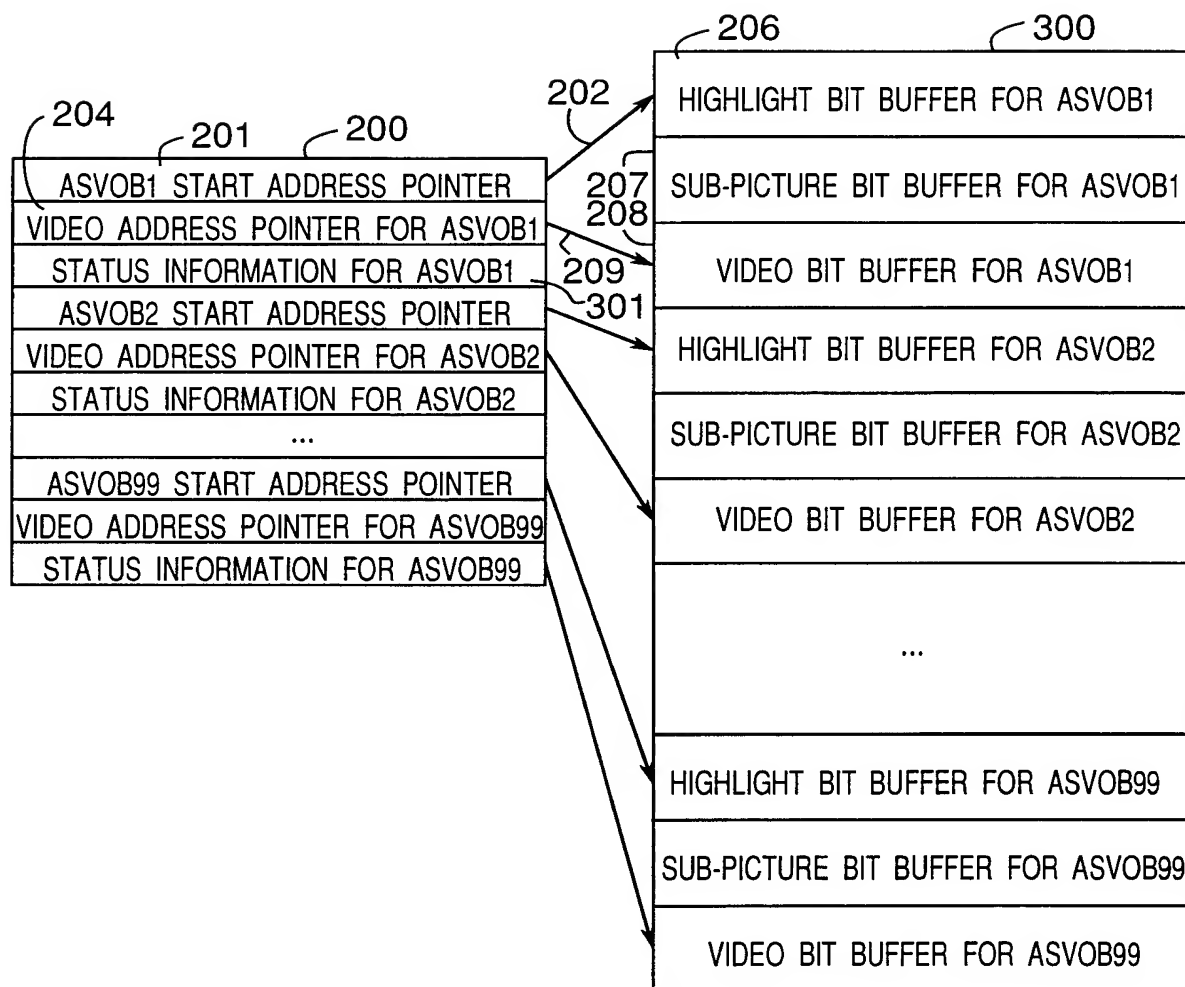
Fig.3

Fig.4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 00/06643

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/52 G11B20/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 940 815 A (SAMSUNG ELECTRONICS CO LTD) 8 September 1999 (1999-09-08)	1
A	paragraph '0050! - paragraph '0066! ----	2-9
A	EP 0 918 331 A (VICTOR COMPANY OF JAPAN) 26 May 1999 (1999-05-26)	1-9
	paragraph '0385! - paragraph '0420! ----	
A	EP 0 795 870 A (PIONEER ELECTRONIC CORP) 17 September 1997 (1997-09-17)	1-9
	page 14, line 31 -page 16, line 45 ----	
A	EP 0 797 197 A (TOKYO SHIBAURA ELECTRIC CO) 24 September 1997 (1997-09-24)	1-9
	page 5, column 7, line 13 - line 50 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

25 January 2001

Date of mailing of the international search report

01/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Marie-Julie, J-M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 00/06643

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0940815	A	08-09-1999	JP	11353809 A	24-12-1999
EP 0918331	A	26-05-1999	JP	11162120 A	18-06-1999
			CN	1218252 A	02-06-1999
			JP	11219579 A	10-08-1999
			JP	2000003561 A	07-01-2000
EP 0795870	A	17-09-1997	JP	9252449 A	22-09-1997
			US	6108486 A	22-08-2000
EP 0797197	A	24-09-1997	CA	2200538 A	21-09-1997
			CN	1171598 A	28-01-1998
			EP	0797198 A	24-09-1997
			JP	2810029 B	15-10-1998
			JP	9312065 A	02-12-1997
			JP	2810030 B	15-10-1998
			JP	9312066 A	02-12-1997
			KR	256662 B	15-05-2000
			US	5953375 A	14-09-1999
			US	5892848 A	06-04-1999